

ASME 4500 Limited Class

Page 1 of 2

Applications

Boiler drains
Turbine drains
Above and below seat drains
Feedwater drains
Steam drum vents
Superheater vents and drains
Sootblower isolation
Isolation valve for bypass lines
Economizer header drains

End Connections

Socketweld
Buttweld
Flanged¹

Sizes

3/4 to 2-1/2 inch

¹ Available Upon Request

Features**Ball and Seats**

- Mate-lapped for 100% contact
- Ensures absolute shutoff
- Corrosion resistant
- Seats are protected from flow in open / closed position

Coating

- Withstands thermal shock
- Handles high cycling applications
- High strain to fracture
- Maintains strength of base metal
- Erosion resistant

Rigid Mounting Bracket

- Designed to support actuator in any position

Stem & Packing Arrangement

- Live loading
- Quarter-turn non-rising stem does not deteriorate packing
- Extensive stuffing box
- Dual anti-extrusion rings keep packing in place

Mechanical Precision Stop

- Prevents turning ball 180°
- Eliminates misalignment

Seat Spring


- Assisted by line pressure, provides a constant mechanical force on ball against seat to maintain seal

Bill of Materials

Item No.	Description	Material
1	Ball	Inconel 718 / Spray & Fuse
2	Seat	Inconel 718 / CC Coated
3	Spring	Inconel 718
4	Body	A182 F22 A182 F91
5	Stem	Gr 660 / Inconel 718
6	Stem Bushing	431SS / 410SS / Melonite and Xylan Coated
7	Gland Thruster	431SS / 410SS / Melonite and Xylan Coated
8	Gland Flange	410SS
9	Stem Packing	Expanded Graphite
10	Anti-Extrusion Rings	Braided Graphite w/ Inconel Wires
11	Metal Anti-Extrusion Ring	316SS
12	Pusher Seat	431SS / 410SS / Nitrided
13	Live Loading	Inconel 718

SS = Stainless Steel
CC = Chromium Carbide

- Integral vented body design allows installation per ASME B31.1 PWT requirements
- Standard four-year warranty; one-year warranty on high-cycle applications (1 cycle per day, 365 days per year)
- Patented design

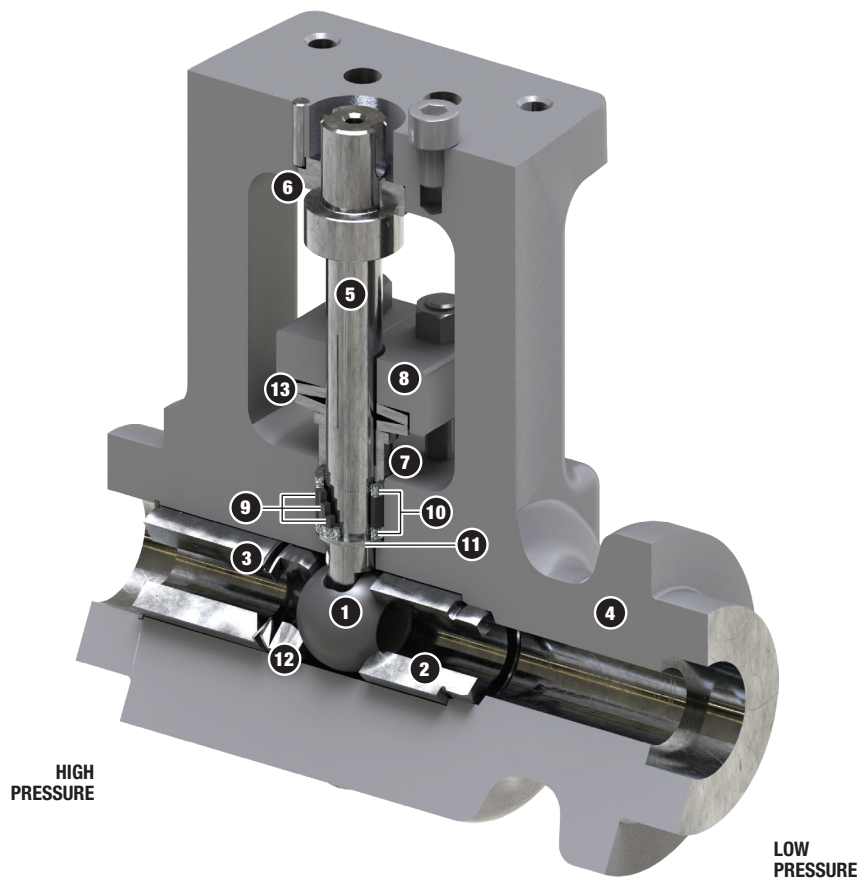


Engineered for Extreme Conditions

Dimensions (in)

Model	Bore	SW End	A	B	C	D	E	Weight
iRSVP-UC	0.63	3/4	4.72	9.47	13.56	6.00	7.34	32 lb
		1, 1-1/2	3.25	8.00	13.56	6.00	7.34	32 lb
iRSVP-UF	1.00	1-1/2, 2	4.29	10.38	17.94	7.48	9.42	81 lb
		2-1/2	4.29	10.38	17.94	7.48	9.42	84 lb

Dimensions (mm)

Model	Bore	SW (DN)	A	B	C	D	E	Weight
iRSVP-UC	16	20	120	241	344	152	187	14 Kg
		25, 40	83	203	344	152	187	14 Kg
iRSVP-UF	25	40, 50	109	264	456	190	239	37 Kg
		65	109	264	456	190	239	38 Kg

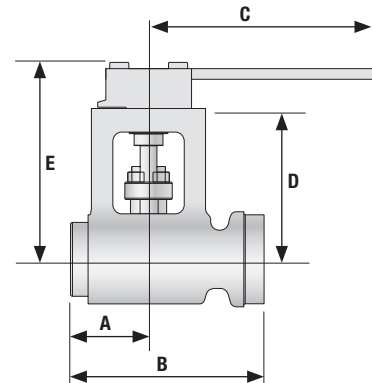

Cv

Bore (inches)	Pipe Size (inches) / Schedule							
	1 Sch 160	1 Sch XXS	1-1/2 Sch 160	1-1/2 Sch XXS	2 Sch 160	2 Sch XXS	2-1/2 Sch 160	2-1/2 Sch XXS
0.63	21	25	12	14	12	13	—	—
1.00	—	—	—	—	38	43	33	37

Temperature vs Pressure — Limited Class Ratings

Class	Mat'l.	Temperature (°F)															
		-20 to 100	200	300	400	500	600	650	700	750	800	850	900	950	1000	1050	1100
ASME 4500 Maximum Pressure (psig)	F22 ²	11250	11250	11090	10915	10865	10815	10735	10605	10605	10605	10160	9000	7556	6213	4064	2546
	F91	11250	11250	11250	11250	11250	11250	11250	10995	10930	10800	10160	9000	7556	7348	7140	6932
Class	Mat'l.	Temperature (°C)															
		-29 to 38	50	100	150	200	250	300	325	350	375	400	425	450	475	500	538
ASME 4500 Maximum Pressure (barg)	F22 ²	775.7	775.7	774.3	764.3	753.4	749.7	746.7	743.9	738.1	731.3	731.3	731.3	707.6	641.3	535.4	428.3
	F91	775.7	775.7	775.7	775.7	775.7	775.7	775.7	775.7	771.4	757.4	753.2	744.6	707.6	641.3	534.0	533.3

²F22 not recommended for prolonged use above 1100°F / 593°C per ASME B16.34.



This ASME 4500 Class iRSVP convection vent valve was designed to handle extremely high pressure and elevated temperatures coming from the boiler.